


ISO Low Voltage Insulators, Imperial Thread – ISO1-516 (559610)



- Great stability of electrical and mechanical parameters
- High resistance to leakage current
- UL® Recognized in E125470 and evaluated for dielectric withstand rating of 1,500 VAC/DC
- Halogen free
- RoHS compliant

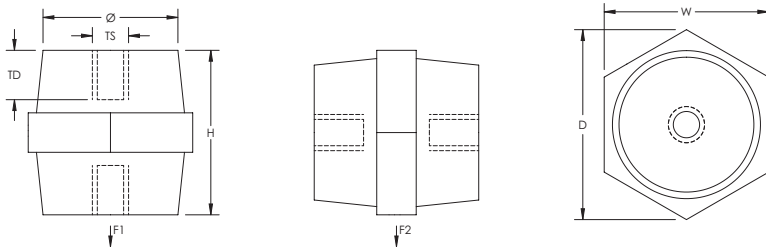

Part Number	ISO1-516
Article Number	559610
Material	Glass Fibre Reinforced Polyester Steel
Finish	Electrogalvanized
Working Temperature	-40 to 130 °C
Flammability Rating	UL® 94V-0
Height (H)	25.4 mm
Hex Width (W)	1.1"
Thread Size (TS)	5/16 UNC
Thread Depth (TD)	7.9 mm
Diameter (Ø)	20.8 mm
Insulation Voltage	1,500 VAC
Static Load 1 (F1)	6,672 N
Static Load 2 (F2)	1,557 N
Unit Weight	0.027 kg
Certifications	cURus
Standard Packaging Quantity	50 pc
UPC	78285657937

Creepage and clearance distances need to be in accordance with the relevant application standard.



UL, UR, cUL, cUR, cULus and cURus are registered certification marks of UL LLC.

WARNING

ERICO products shall be installed and used only as indicated in ERICO's product instruction sheets and training materials. Instruction sheets are available at www.erico.com and from your ERICO customer service representative. Improper installation, misuse, misapplication or other failure to completely follow ERICO's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death.

Copyright © 2015 ERICO International Corporation. All rights reserved.

CADDY, CADWELD, CRITEC, ERICO, ERIFLEX, ERITECH, and LENTON are registered trademarks of ERICO International Corporation.

